

HYFIRE® 6 EZ SERIES FOR LATE MODEL EFI ENGINES WITH A DISTRIBUTOR

HYFIRE 6 EZ Digital CD Ignition


Features At A Glance:

- Power up and go; easy installation uses the factory external coil to trigger the system
- High output multi-spark ignition system provides quicker acceleration and throttle response
- Digital microprocessor controlled circuitry provides more performance and lower power draw
- Lightweight aluminum housing is easy to mount and dissipates heat for durability
- Works with points, OEM or aftermarket electronic distributors with an external coil
- Complete with matching ProMaster E-Coil #30441 and installation kit
- (Not for use with HEI style distributors using an internal coil)
- 6856M has adjustable rev-limiting from 1,000-9,900 RPM



HYFIRE 6 EZ Digital CD Ignition 6855M

HYFIRE 6 EZ Digital CD Ignition
w/Rev Limiting 6856M

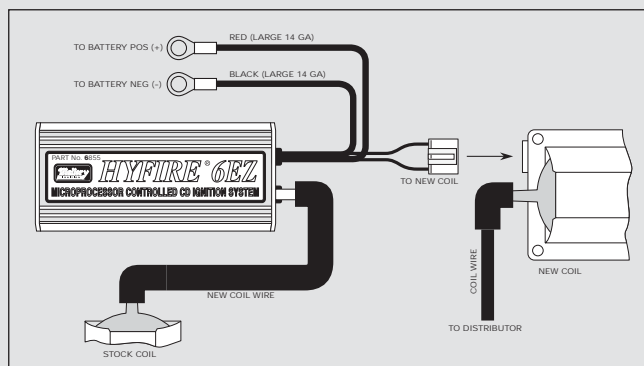

<i>Mallory #6855M/#6856M HYFIRE 6 EZ</i>	<i>Product Feature Comparison</i>	<i>MSD # 6200 6A</i>
Digital	Digital or Analog	Analog
Yes	Multiple Spark	Yes
Yes	Easy Installation	No
520	Primary Output Voltage	450-480
45,000	Secondary Voltage Output	45,000
135mJ	Spark Energy	105-115 mJ
.6 Amps	Current Draw Per 1,000 RPM	1 Amps
8-16	Operating Voltage Required	12-18
30441 Included	Recommended Coil	8252
4 - 6 - 8	Number of Cylinders	4 - 6 - 8
Extruded Aluminum	Housing Construction	Cast Aluminum